


## 20-pin SOP (300mil) Outline Dimensions

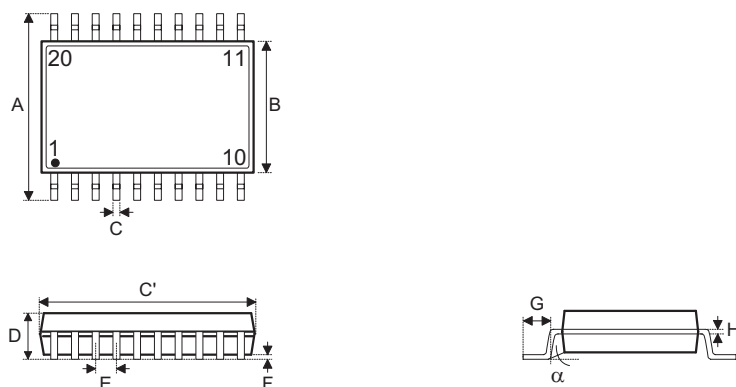

| Symbol | Dimensions in inch |      |       |
|--------|--------------------|------|-------|
|        | Min.               | Nom. | Max.  |
| A      | 0.406 BSC          |      |       |
| B      | 0.295 BSC          |      |       |
| C      | 0.012              | —    | 0.020 |
| C'     | 0.504 BSC          |      |       |
| D      | —                  | —    | 0.104 |
| E      | 0.050 BSC          |      |       |
| F      | 0.004              | —    | 0.012 |
| G      | 0.016              | —    | 0.050 |
| H      | 0.008              | —    | 0.013 |
| α      | 0°                 | —    | 8°    |

| Symbol | Dimensions in mm |      |      |
|--------|------------------|------|------|
|        | Min.             | Nom. | Max. |
| A      | 10.30 BSC        |      |      |
| B      | 7.50 BSC         |      |      |
| C      | 0.31             | —    | 0.51 |
| C'     | 12.80 BSC        |      |      |
| D      | —                | —    | 2.65 |
| E      | 1.27 BSC         |      |      |
| F      | 0.10             | —    | 0.30 |
| G      | 0.40             | —    | 1.27 |
| H      | 0.20             | —    | 0.33 |
| α      | 0°               | —    | 8°   |